



Unit 626 Kilshane Avenue, North West Business Park, Ballycoolin, Dublin 15, Ireland  
Telephone: +353 1 8612 632, Fax: +353 1 8612 647, email: sales@driveriteltd.com

## W21-760-3475 Toyota Hilux Vigo

### **INSTALLATION INSTRUCTIONS**

All work should be carried out in a properly equipped workshop with due regard to Health and Safety Regulations. No further reference to Health and Safety Regulations will be made, but they must be considered at all times.

The kit should be opened and the contents checked against the parts list provided.

Identify the various components and familiarise yourself with them using drawings and information provided.

***WARNING***

*Do not inflate this assembly when it is unrestricted. When installed, a minimum of 10 psi should be maintained in the air bellows at all times to avoid damage. Do not inflate beyond 100 psi.*

***IMPORTANT***

*This kit is not designed to increase the GVW of your vehicle. For your safety and to prevent possible damage to your vehicle, do not exceed the maximum load recommended by the vehicle manufacturer.*



**PREPARATION:**


In order for the kit to be installed on the vehicle, it is necessary firstly to provide free space within the range of the rear axle. Usually, there are no additional components which could interfere with installing the kits in this space. However, if components are interfering with mounting the kit, then it must be clarified whether it is still possible to mount this kit or whether these additional parts can be moved accordingly. You must always take care not to interfere with the vehicle parts, e.g. brake hoses, cables etc. These could be jammed or damaged while assembling the kit. In order to ensure this does not occur, they must be partially shifted.

**Parts List**

Description	Quantity
Upper Bracket	1 (Handed)
Lower Bracket	1 (Handed)
M8 x 100mm Bolt	4
M8 x 20 Bolt	1
8mm Flat Washers	6
8mm Spring Washers	4
M8 Locknut	5
5/16 Flat Washer	4
3/8" x 3/4"UNC Countersunk Bolt	4

Description	Quantity
3/8" UNF Flange Locknut	4
3/8" Flat Washer	4
Cable Ties	12
224C-1.5 Air Bellows	2
1/4" Tee Piece	1
1/4" Inflation Valve	2
1/4" Elbow	2
1/4" Tubing	5M

**BRACKETS**

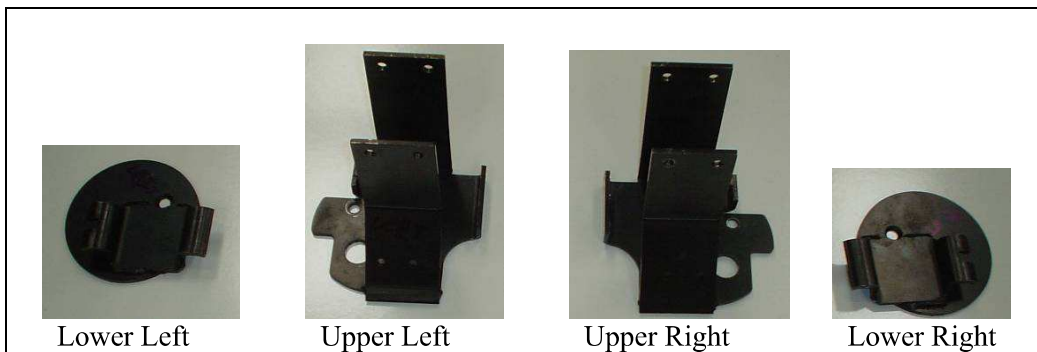







**INSTALLATION**

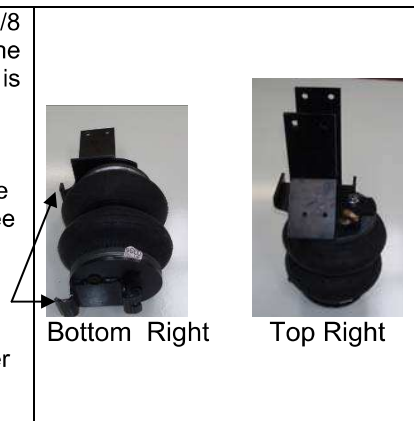


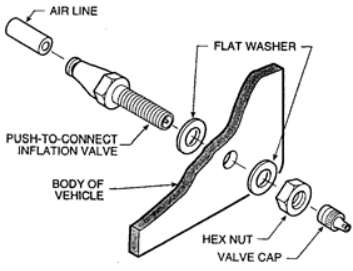
Assemble the Top Bracket to the air spring using the 3/8 UNF Flange Locknut. Screw in the elbow air fittings to the top of the airsprings. The use of thread sealant is recommended here.

Using 3/8 UNC x 3/4" Counter sunk bolts, attach the bottom brackets to the airsprings as shown, ensuring the brackets are orientated as shown. Tighten the bolts. (See torque figures below).

Align the Top and Bottom bracket as shown in the photograph, ensuring that the flanges of the Upper Brackets are running in line with the flanges of the Lower Bracket.



<p>Raise the rear of the vehicle and drop the back axle to allow as much space to work with as possible. Do not over stretch and brake lines or cables. Loosen the U-bolts on the leaf springs and remove the bump stops</p>	
<p>Compress the air spring assembly and hold it compressed using an Inflation valve as shown.</p>	
<p>Place the assembly between the chassis and leaf spring. Ensure that the air spring assembly is facing inboard (towards the centre of the vehicle).</p> <p>Slip the U-bolts over the Lower Brackets as shown.</p> <p>Attach the Upper Brackets to the chassis using the M8 Bolts with washers and Nyloc nuts. Tighten the Upper Brackets until the bracket has pulled in to rest against the upper part of the chassis on both sides.</p>	 
<p>Attach the upper bracket so that the front and rear flanges sits on the chassis bracket as shown. The flat area of the Chassis Bracket should be fully resting on the Upper Bracket. Torque the U-bolts using the specifications given below.</p>	

<p>Insert the ¼” tubing and feed the tubing up into chassis. When connecting the two air springs ensure the tubing will not be affected by the heat of the exhaust. Using the cable ties secure the tubing to the floor of the vehicle and protect it from the exhaust where possible. When cutting the tubing ensure the cut is square and clean. Push the tubing firmly into the fitting until a click is felt.</p>	
<p>For vehicles without ABS and have a LSV fitted you will need to fit the brake modulation kit. The part number is W21-760-3452.</p> <p><b>For further detail, please contact us on +353 1 8612632 to request a brake modulation kit.</b></p>	
<p>Decide which side of the vehicle to mount the inflation valve: a suggested location is at the front or rear of the rear wheel arch. It should be easily accessible but protected, and on the same side of the vehicle as you intend to mount the pressure gauge (if applicable): a suitable location for this is inside the rear of the vehicle.</p>	
<p>Drill an 8 mm (5/16”) hole and mount the inflation valve as shown in the diagram, pushing the valve through the hole from behind and attaching with 2 washers and a nut.</p> <p>Cut the air tube to length, making sure the end is cut squarely, and push the end as far as possible into the back of the inflation valve.</p>	
<p><u>OPTION:</u> To mount a pressure gauge inside the rear of the vehicle. Cut the air tube squarely a short distance back from the inflation valve, and insert the ends of the tubes into a Tee fitting. Cut a length of tube long enough to reach from the T fitting to the gauge. Feed the air tube up from below and connect the tube into the gauge and the Tee fitting.</p>	

Cut a generous length of air tubing to reach from the inflation valve to the top of the nearest air spring, following the line of the inner wheel arch and across to the top of the air spring, with sufficient slack to allow suspension movement. Insert one end of this tube into the air fitting in the air spring.

Cut another generous length of air tubing to reach from the top of one air spring to the top of the other, routing it along the chassis so that it can be neatly held in place. Insert one end of this tube into the air fitting in the second air spring.

Cut the tube between the inflation valve and the first air spring squarely close to the air spring and insert a T fitting between the 2 ends. Connect the tube from the air spring on the other side of the vehicle into the T fitting.

**IMPORTANT:**

Do not attach air tubing to brake lines.

Protect the tube with sleeving where there are any sharp edges or sources of heat.

**Examination:**

After assembly, inflate air bellows and check all mounting bolts are tight. Screw all connections tight again. It must be ensured that the mounting brackets can not move. If the plates touch the brake hose at the air spring, then these must be moved by suitable means. Check for air leaks, using soapy water if necessary.

**TORQUE SETTINGS**

U bolts    165 Nm +/- 10%

Air spring bolts 3/8 UNC                                  25 Nm

**Note:** The torque values given are for general information, not for specific installation. Always use the torque values of the factory service manual if they differ for the torque values recommended here.