

Jeep, Truck & SUV Winches: M8000-s



WARN M8000-s

Compact, tough and with Synthetic Rope

Its low-profile design makes it perfect for most trucks, Jeeps and SUVs

- Comes with 80 ft. of 3/8" (24.38m of 9.5mm) WARN Spydura™ synthetic rope, hook, remote control on 12' (3.7m) lead and polished aluminum hawse fairlead
- Premium Series winch that delivers classic design, proven performance, and legendary WARN reliability
- Series-wound, high-speed motor provides fast line speed and strong pulls
- Low-profile design and separate control box allows for a wide range of mounting options
- New, next-generation electrical control box and hand-held remote control
- Durable 3-stage planetary geartrain for smooth, reliable, operation
- Exclusive brake design provides superior control while winching
- Chip-resistant powder-coated finish

The corded WARN remote is constructed of durable EPDM rubber, and features enhanced switch sealing.

M8000-s SPECS/PART NUMBERS

Winch model: WARN M8000-s

Part number: PN 88552

Rated line pull: 8,000 lbs., (3630 kg) single-line

Motor: Series Wound

Electrical controls: Contactor

Remote Control: Remote switch 12' (3.7m) lead

Geartrain: 3-Stage Planetary

Gear ratio: 216:1

Clutch (freespooling): Sliding Ring Gear

Brake: Automatic Direct Drive Cone

Drum diameter/Length: 2.5"/9.0" (6.4cm/23cm)

Weight: 55 lbs. (25 kg)

Synthetic Rope: 80', 3/8" diameter (24.38m, 9.5mm diam.)

Fairlead: Polished Aluminum Hawse

Recommended Battery: 650 CCA minimum for winching


Battery leads: 2 gauge, 72" (1.83m)

Finish: Argent Gray Powder Coat

12V DC performance specs (first layer of drum)

| Line Pull Lbs.(Kgs.) | Line Speed FT./min(M/min.) | Motor Current | Pull by layer layer/Lbs(Kgs.) |
|-------------------------|-------------------------------|------------------|----------------------------------|
| 0 | 42 (12.8) | 80 amps | 1/8000 (3629) |
| 2000 (910) | 16 (4.88) | 200 amps | 2/7280 (3302) |
| 4000 (1810) | 11.9 (3.63) | 285 amps | 3/6670 (3026) |
| 6000 (2720) | 9.79 (2.98) | 350 amps | 4/6230 (2826) |
| 8000 (3630) | 8.01 (2.44) | 435 amps | |

Above performance specs are based on first layer of drum

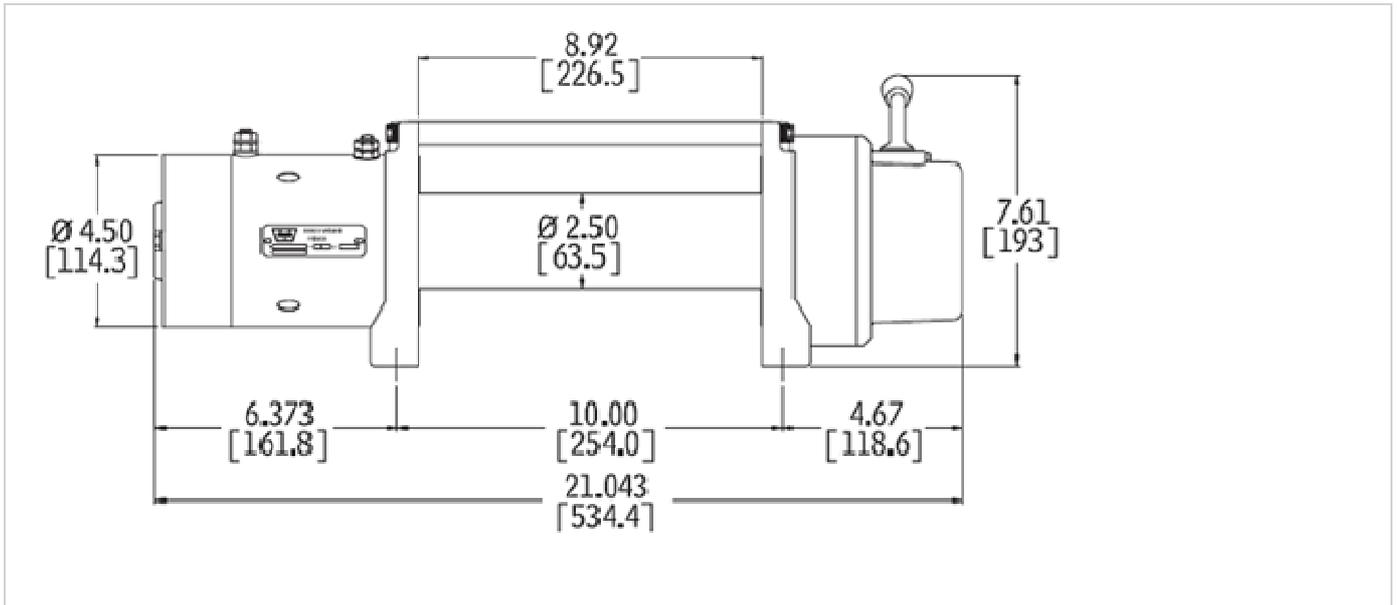

Winch Dimensions: 21.04" L. x 6.3" D. x 7.6" H.

(534mm L. x 160m D. x 193mm H.)

Mounting Bolt Pattern: 10.0" x 4.5" **(254mm x 114.3mm)**