

ATV & Side X Side Winches: ProVantage 3500-s



ProVantage 3500-s

A powersports winch big on features and power

If you're riding on the edge and pushing the limits of large ATV or Side x Side, you need a winch that'll keep up. With 15m of 5mm synthetic rope, a powerful permanent magnet motor, all-metal gear end housings, and a robust 1588 kg capacity, the last thing you'll worry about on the trail is getting stuck.

- 15m x 5mm wire rope and double-powder-coated hawse fairlead
- Hook, tie rods, and body feature attractive, corrosion-resistant black finish
- Three-stage planetary gear train for smooth, efficient operation.
- Patented roller disc brake for outstanding control while winching
- Ergonomic clutch handle
- Fully sealed motor and drive train to keep the elements out
- Plow roller fairlead
- Mini rocker control switch
- Wireless remote
- CE Compliant

If you're riding on the edge and pushing the limits of large ATV or Side x Side, you need a winch that'll keep up.

SPECS/PART NUMBERS

Winch model: WARN ProVantage 3500-S

Part numbers: 91036

Rated line pull: 3500 lbs. (1588 kg)

Motor: 12V Permanent Magnet

Sealing: Full

Geartrain: 3-Stage Planetary

Rope Material: Synthetic

Rope length & diameter: 50' x 3/16" (15m x 5mm)

Primary Control: Handlebar Mini-Rocker

Remote Control: Wireless

Best for plow lifting: Yes


Brake: Patented Roller Disc

Certifications: CE Compliant

Mechanical Warranty: 3 Year

Electrical Warranty: 3 Year

PERFORMANCE DATA			PULL BY LAYER
Line Pull Lbs.(Kgs.)	Line Speed FT./min(M/min.)	Motor Current	Pull by layer layer/Lbs(Kgs.)
0	21.1 (6.4)	21.6	1/3500 (1588)
500 (227)	17.2 (5.2)	51.8	2/2125 (1349)
1000 (454)	14.4 (4.4)	79.3	3/1806 (1147)
1500 (680)	12.1 (3.7)	107.3	4/1535 (975)
2000 (907)	9.9 (3.0)	137.9	
2500 (1134)	8.1 (2.5)	168.0	
3000 (1361)	6.8 (2.1)	194.4	
3500 (1588)	5.8 (1.8)	220.0	

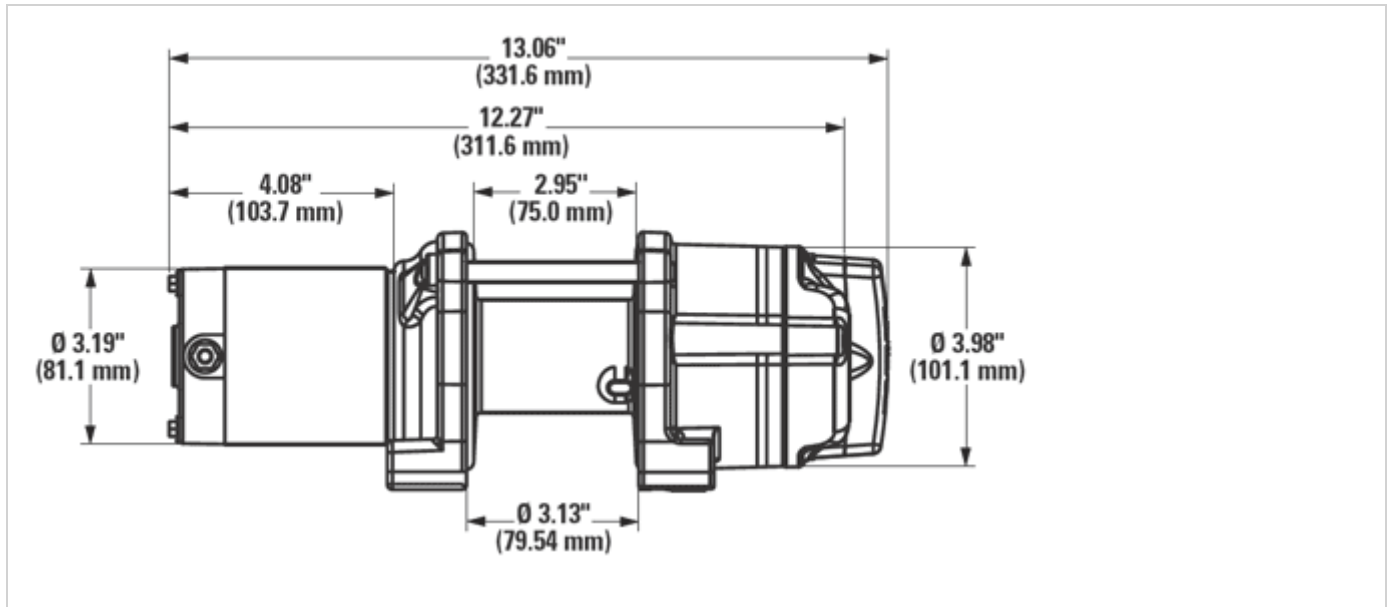

Winch Dimensions: 13.1" L. x 4.53" D. x 4.69" H. (333mm L. x 115mm D. x 119mm H.)

Mounting Bolt Pattern: 3.0" x 4.87" (76mm x 124mm)